

# TYPE KK AIR FILTERS - 1" NOMINAL

## PERMANENT • DRY TYPE • POLYESTER MEDIA

### For Electronic and Electrical Cabinet Ventilation and Air Moving Systems

Frame: 24 Gauge Galv - Expanded Face Pieces: 26 Gauge Galv, Flattened, Medium Openings  
Media: 1 Layer 4 oz Polyester Sandwiched between 18x14 Mesh Screen, .009 Dia

Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
KKGG1-1224	902517	11.50	23.50	0.875	12
KKGG1-1620	901307	15.50	19.50	0.875	10
KKGG1-1625	901308	15.50	24.50	0.875	13
KKGG1-2020	901309	19.50	19.50	0.875	12
KKGG1-2025	901310	19.50	24.50	0.875	13
KKGG1-2424	901311	23.375	23.375	0.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: KKGG1-50

Frame: 032 Aluminum - Expanded Face Pieces: 0.025 Aluminum, Flattened Medium Opening  
Media: 1 Layers 4 oz Polyester Sandwiched between 18x16 Mesh Screen, .011 Dia

Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
KKAA2-1224	902524	11.50	23.50	1.875	12
KKAA2-1620	902525	15.50	19.50	1.875	10
KKAA2-1625	902526	15.50	24.50	1.875	13
KKAA2-2020	902527	19.50	19.50	1.875	12
KKAA2-2025	902528	19.50	24.50	1.875	13
KKAA2-2424	902529	23.375	23.375	1.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: KKAA1-50

Frame: 20 Gauge 304SS - Expanded Face Pieces: 18 Gauge 304SS, Flattened  
Media: 2 Layers 4 oz Polyesters Sandwiched between 18x18 Mesh Screen, .009 Dia


Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
KKSS2-1224	904934	11.50	23.50	1.875	12
KKSS2-1620	904935	15.50	19.50	1.875	10
KKSS2-1625	904936	15.50	24.50	1.875	13
KKSS2-2020	904644	19.50	19.50	1.875	12
KKSS2-2025	904643	19.50	24.50	1.875	13
KKSS2-2424	904937	23.375	23.375	1.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: KKSS1-50

#### SERVICING

Type KK filters can be cleaned by removing any excess dirt and washing the filter with warm water and detergent. Allow the filter to dry before placing it back into service. No recharging with filter adhesive is necessary as the Type DD polyester media is used dry.

This document contains information proprietary to Airsan Corporation, Milwaukee, WI. All rights to manufacture, copy, reproduce, or dispose of this drawing, or its contents are reserved unless specified in writing by Airsan Corporation.

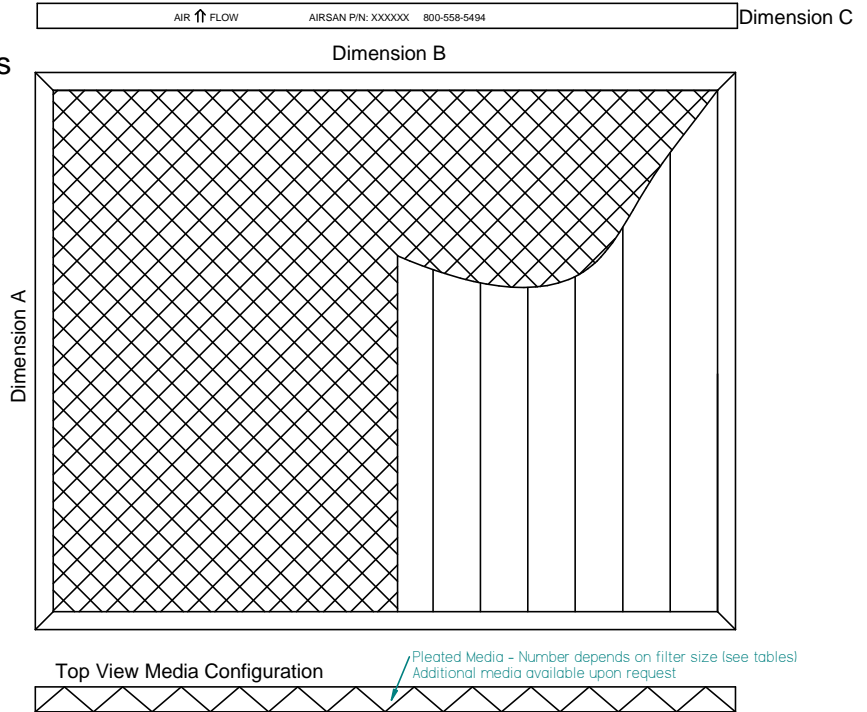

#### TECHNICAL DATA

##### Initial Resistance

1" Type KK - 0.18" w.g. at 1000 CFM

	NAME	DATE	AIRSAN		
DRAWN	DavidG	12-04-2012	4554 W. Woolworth Ave, Milwaukee, WI 53218, 800-558-5494 contactus@airsan.com - www.airsan.com		
CHECKED			TITLE		
ENG APPR			Airsan Type KK - 1 Inch		
MGR APPR			SIZE B	DWG NO	REV
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ±XX° 2 PL ±.003 3 PL ±0.125			KK1		
			SCALE:	WEIGHT:	SHEET 1 OF 1