

TYPE DD AIR FILTERS - 2" NOMINAL PERMANENT • DRY TYPE • POLYESTER MEDIA For Engines, Compressors, and Industrial Ventilation.

Frame: 18 Gauge Galv - Expanded Face Pieces: 18 Gauge Galv, Flattened
Media: 2 Layers 4 oz Polyester Sandwiched between 18x14 Mesh Screen, .009 Dia

Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
DDGG2-1224	902530	11.50	23.50	1.875	12
DDGG2-1620	901442	15.50	19.50	1.875	10
DDGG2-1625	901444	15.50	24.50	1.875	13
DDGG2-2020	901445	19.50	19.50	1.875	12
DDGG2-2025	901446	19.50	24.50	1.875	13
DDGG2-2424	901447	23.375	23.375	1.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: DDGG2-50

Frame: 063 Aluminum - Expanded Face Pieces: 050 Aluminum, Flattened
Media: 2 Layers 4 oz Polyesters Sandwiched between 18x16 Mesh Screen, .011 Dia

Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
DDAA2-1224	902531	11.50	23.50	1.875	12
DDAA2-1620	902532	15.50	19.50	1.875	10
DDAA2-1625	902533	15.50	24.50	1.875	13
DDAA2-2020	902534	19.50	19.50	1.875	12
DDAA2-2025	902535	19.50	24.50	1.875	13
DDAA2-2424	902536	23.375	23.375	1.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: DDAA2-50

Frame: 20 Gauge 304SS - Expanded Face Pieces: 18 Gauge 304SS, Flattened
Media: 2 Layers 4 oz Polyesters Sandwiched between 18x18 Mesh Screen, .009 Dia




Description	Part Number	Dim A	Dim B	Dim C	# of Pleats
DDSS2-1224	904586	11.50	23.50	1.875	12
DDSS2-1620	902915	15.50	19.50	1.875	10
DDSS2-1625	902916	15.50	24.50	1.875	13
DDSS2-2020	902917	19.50	19.50	1.875	12
DDSS2-2025	902918	19.50	24.50	1.875	13
DDSS2-2424	902919	23.375	23.375	1.875	12

Special sized filters available upon request. When submitting request add suffix "-50" followed by actual dimensions. Example: DDSS2-50

SERVICING

Type DD filters can be cleaned by removing any excess dirt and washing the filter with warm water and detergent. Allow the filter to dry before placing it back into service. No recharging with filter adhesive is necessary as the Type DD polyester media is used dry.

This document contains information proprietary to Airsan Corporation, Milwaukee, WI. All rights to manufacture, copy, reproduce, or dispose of this drawing, or its contents are reserved unless specified in writing by Airsan Corporation.

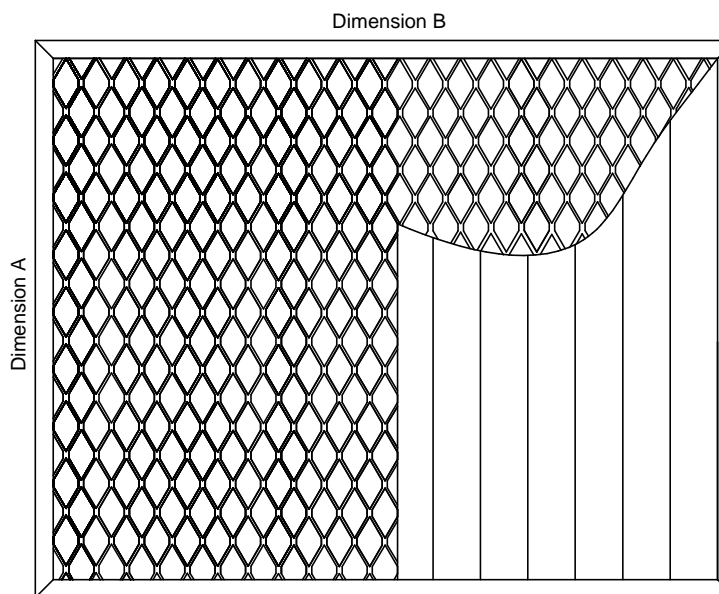

TECHNICAL DATA

Initial Resistance

2" Type DD - 0.25" w.g. at 437 fpm

	NAME	DATE	4554 W. Woolworth Ave, Milwaukee, WI 53218, 800-558-5494 contactus@airsan.com - www.airsan.com		
DRAWN	DavidG	12-04-2012			
CHECKED			Airsan Type DD - 2 Inch		
ENG APPR			SIZE B	DWG NO	REV
MGR APPR				DD2	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ±XX° 2 PL ±.XXX 3 PL ±0.125			SCALE: WEIGHT: SHEET 1 OF 1		