




Website: <http://www.airsan.com>
Email: contactus@airsan.com

4554 West Woolworth Avenue
Milwaukee, WI 53218

Phone (414) 353-5800 or (800) 558-5494
Fax (414) 353-8402

TYPE AG GREASE FILTERS


The Ultimate Heavy Duty Grease Filter.

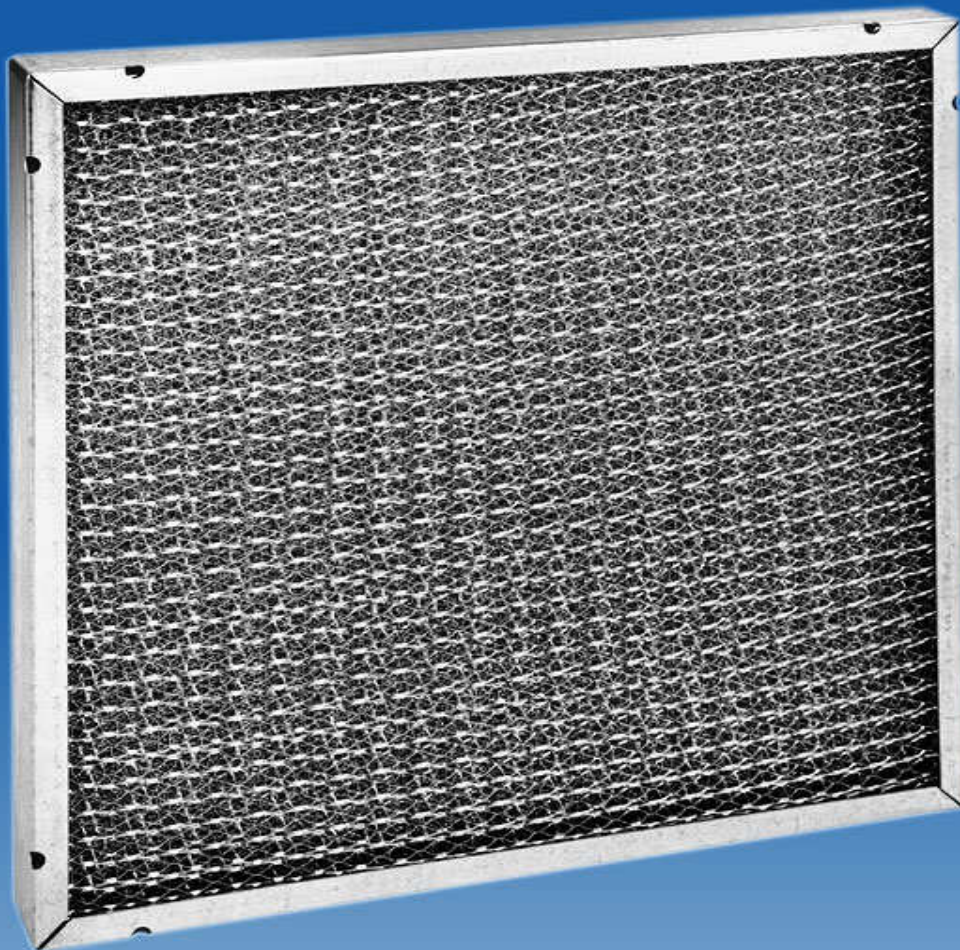

AIRSAN TYPE AG Grease Filters

The most efficient and durable multi-layered Grease Filter available.

Standard AG Grease Filters are permanent, cleanable, and feature a sturdy 18 gauge galvanized steel frame. The filter media is crimped 26 gauge expanded metal and galvanized screen wire.

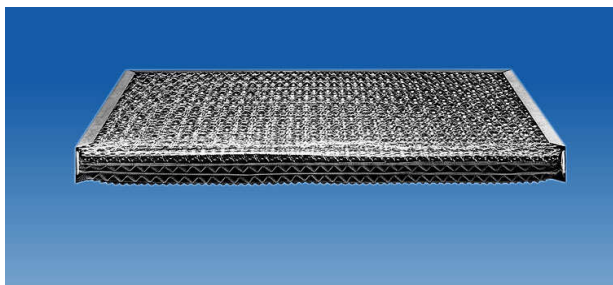

Standard AG Grease Filters, on an experience basis, have proven that you may expect a long filter life. They operate effectively over charcoal broilers, as well as ranges, grilles, and ovens. The special extra heavy expanded metal media on the air entering face absorbs heat and resists "burn-outs".

AG Grease Filters are specifically designed to stop grease from entering the exhaust ducts. Scientific placement of the 10 piece media creates an air flow pattern that allows for efficient air passage while the airborne grease particles are impinged upon an extensive network of grease trapping surfaces.

PERFORMANCE CHARACTERISTICS

| Nominal Size | | 10x20x2 | 16x20x2 | 20x20x2 | 20x25x2 |
|--------------|----------------------------|-----------------------|---------|---------|---------|
| Net Face FPM | Resistance Clean Inches WG | Filter Capacity – CFM | | | |
| 216 | 0.07 | 231 | 396 | 506 | 644 |
| 288 | 0.11 | 308 | 528 | 675 | 859 |
| 360 | 0.15 | 385 | 660 | 844 | 1074 |
| 432 | 0.20 | 462 | 792 | 1013 | 1288 |

AG FILTERS – STANDARD SIZES

| STOCK NUMBER | CATALOG DESCRIPTION | ACTUAL SIZE | WT (LBS) |
|--------------|---------------------|---|----------|
| 902180 | AG2-1620 | 15½ x 19½ x 1 ⁷ / ₈ | 8 |
| 902181 | AG2-1625 | 15½ x 24½ x 1 ⁷ / ₈ | 9.5 |
| 902182 | AG2-2020 | 19½ x 19½ x 1 ⁷ / ₈ | 9.5 |
| 902183 | AG2-2025 | 19½ x 24½ x 1 ⁷ / ₈ | 11 |
| 902184 | AG2-2424 | 23 ³ / ₈ x 23 ³ / ₈ x 1 ⁷ / ₈ | 12 |

STAINLESS STEEL GREASE FILTERS – TYPE AGS & TYPE AGSS

Type AGS Grease Filters have 20 gauge stainless steel enclosing frames with standard galvanized AG media. Standard sizes as above. Special sizes are available upon request.

Type AGSS Grease Filters are all stainless steel filters, both frame and media. Standard sizes as above. Special sizes are available upon request.

BAIL HANDLES

Optional Bail-Type Handles are available for all AG, AGS, and AGSS Grease Filters. Please specify.

CLEANING SUGGESTIONS

Washing your grease filters daily will insure maximum filter life. When the filter is caked or laden with considerable grease, use a good commercial detergent and allow the filter to soak overnight. After a thorough soaking, rinse the filter with clean warm water and return it to the exhaust system.

SPECIFICATIONS

Furnish Airsan Type AG Grease Filters. Filter weight per square foot of face area shall not be less than 3 lbs. Filters shall contain ten layers of media with the face and the back of the media to be expanded metal as manufactured by Airsan Corporation.



Website: <http://www.airsan.com>
Email: contactus@airsan.com

4554 West Woolworth Avenue
Milwaukee, WI 53218

Phone (414) 353-5800 or (800) 558-5494
Fax (414) 353-8402