




Website: www.airsan.com
Email: contactus@airsan.com

4554 West Woolworth Avenue
Milwaukee, WI 53218

Phone (414) 353-5800 or (800) 558-5494
Fax (414) 353-8402


TYPE GF GREASE FILTERS

Multi-Purpose Air/Grease Filter.

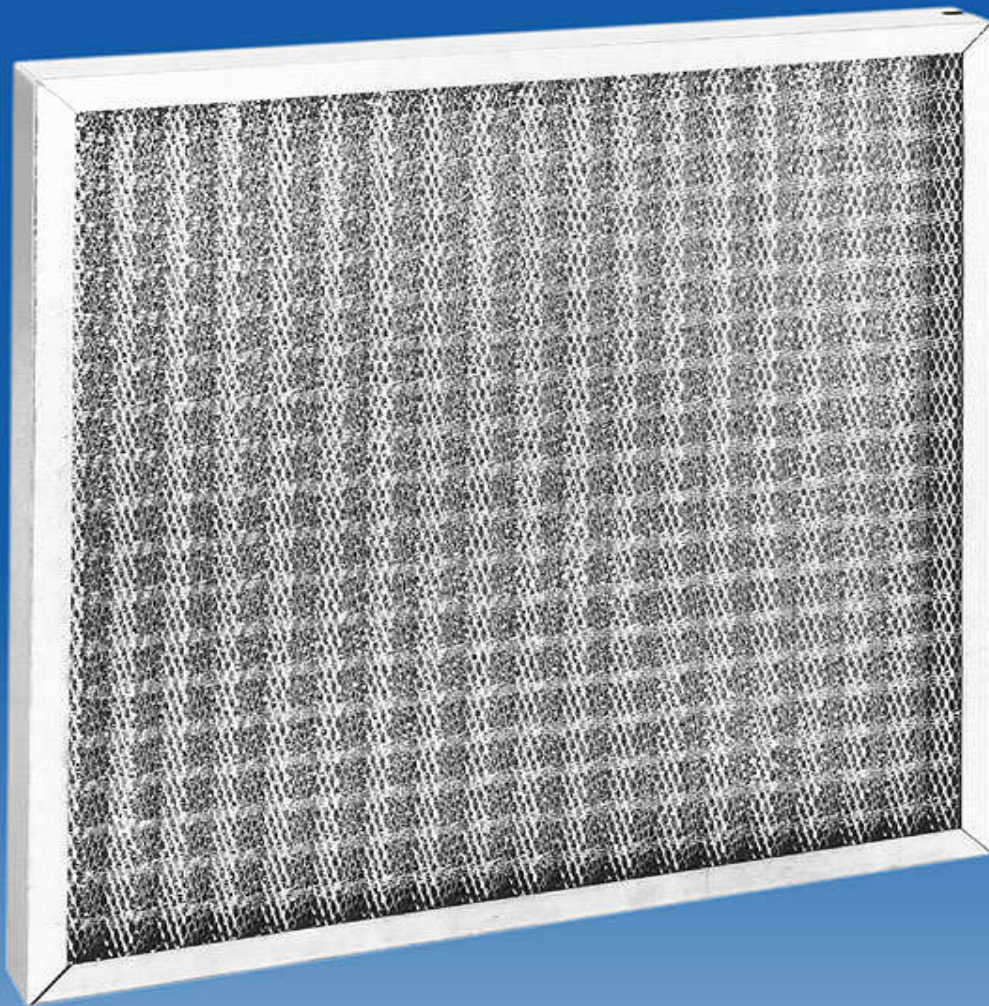

AIRSAN TYPE GF Grease Filters Multi-Purpose Air/Grease Filter.

Standard GF Grease Filters are permanent, cleanable, and feature a sturdy 18 gauge galvanized steel frame. The filter media is crimped 26 gauge expanded metal and galvanized screen wire.

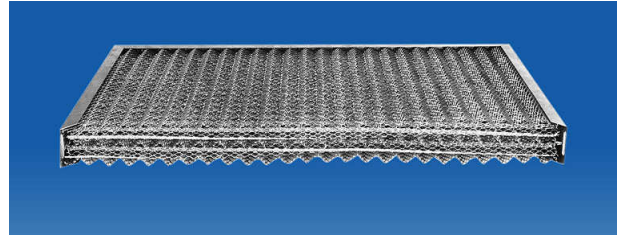

HVAC APPLICATIONS

Scientific placement of the 5 piece media creates an air flow pattern that allows for efficient air passage while the airborne dirt and grease particles are impinged upon an extensive network of trapping surfaces. The dirt and lint stopping capability of the GF Filter promotes the useful life of coil, blowers, and other mechanical equipment.

COMMERCIAL KITCHEN APPLICATIONS

GF Filters are designed to absorb heat and resist burnout. The frame and media are designed to withstand the powerful chemicals used in the filter service industry. Scientific placement of the 5 piece media creates an airflow pattern that allows for efficient air passage while the airborne grease particles are impinged upon an extensive network of grease trapping surfaces. The grease stopping capability of the GF Filter promotes the useful life of fans, motors, and other mechanical equipment.

PERFORMANCE CHARACTERISTICS						GF FILTERS – STANDARD SIZES			
Nominal Size		10 x 20	16 x 20	20 x 20	20 x 25	STOCK NUMBER	CATALOG DESCRIPTION	ACTUAL SIZE	WT (LBS)
Net Face	Resistance Clean	Filter Capacity – CFM							
FPM	Inches WG								
216	0.03	231	396	506	644	902180	GF2-1620	15½ x 19½ x 1 ⁷ / ₈	5
288	0.05	308	528	675	859	902181	GF2-1625	15½ x 24½ x 1 ⁷ / ₈	6
360	0.08	385	660	844	1074	902182	GF2-2020	19½ x 19½ x 1 ⁷ / ₈	6
432	0.11	462	792	1013	1288	902183	GF2-2025	19½ x 24½ x 1 ⁷ / ₈	6
						902184	GF2-2424	23 ³ / ₈ x 23 ³ / ₈ x 1 ⁷ / ₈	8

STAINLESS STEEL AND ALUMINUM GREASE FILTERS – TYPE GFSS & TYPE GFAA

Type GFSS Grease Filters are all stainless steel filters, both frame and media
Type GFAA Grease Filters are aluminum filters, both frame and media.
Standard sizes as above. Special sizes are available upon request.

BAIL HANDLES

Optional Bail-Type Handles are available for all GF, GFSS, and GFAA Grease Filters. Please specify.

CLEANING SUGGESTIONS

Washing your grease filters daily will insure maximum filter life. When the filter is caked or laden with considerable grease, use a good commercial detergent and allow the filter to soak overnight. After a thorough soaking, rinse the filter with clean warm water and return it to the exhaust system.

SPECIFICATIONS

Furnish Airsan Type GF Grease Filters. Filters shall contain five layers of media with the face and the back of the media to be expanded metal as manufactured by Airsan Corporation.

